

4.1.1.5 Virtualized Nodes

[Return to Platforms](#)

About

[Return to Top](#)

A Virtual Node can reside on any machine that supports either [Virtual Machines \(VMs\)](#) or [Application Containers](#) (or referred to as Containers). These can run many different [Hardware Platforms](#) and or [Operating Systems \(OS\) Platforms](#). VMs are more limited by the Hardware Platforms they can run on because of the size of the footprint require for the [hypervisor](#) and the VM, but the Containers are smaller can consequently can run on a wider range of machines.

Superficially, the two can appear to almost identical. However, the VMs have a full Host OS as well as a Guest OS while the Application Containers are lightweight, standalone, executable package of software that includes everything needed to run an application: code, runtime, system tools, system libraries and settings. They are a bit less secure than VMs since there is Containers manage memory versus giving each instance its own “machine” complete with memory.

Containers and VMs have similar goals: to isolate an application and its dependencies into a self-contained unit that can run anywhere (i.e., Virtual Nodes)

Moreover, containers and VMs remove the need for physical hardware, allowing for more efficient use of computing resources through sharing, both in terms of energy consumption and cost effectiveness.

The main difference between containers and VMs is in their architectural approach.

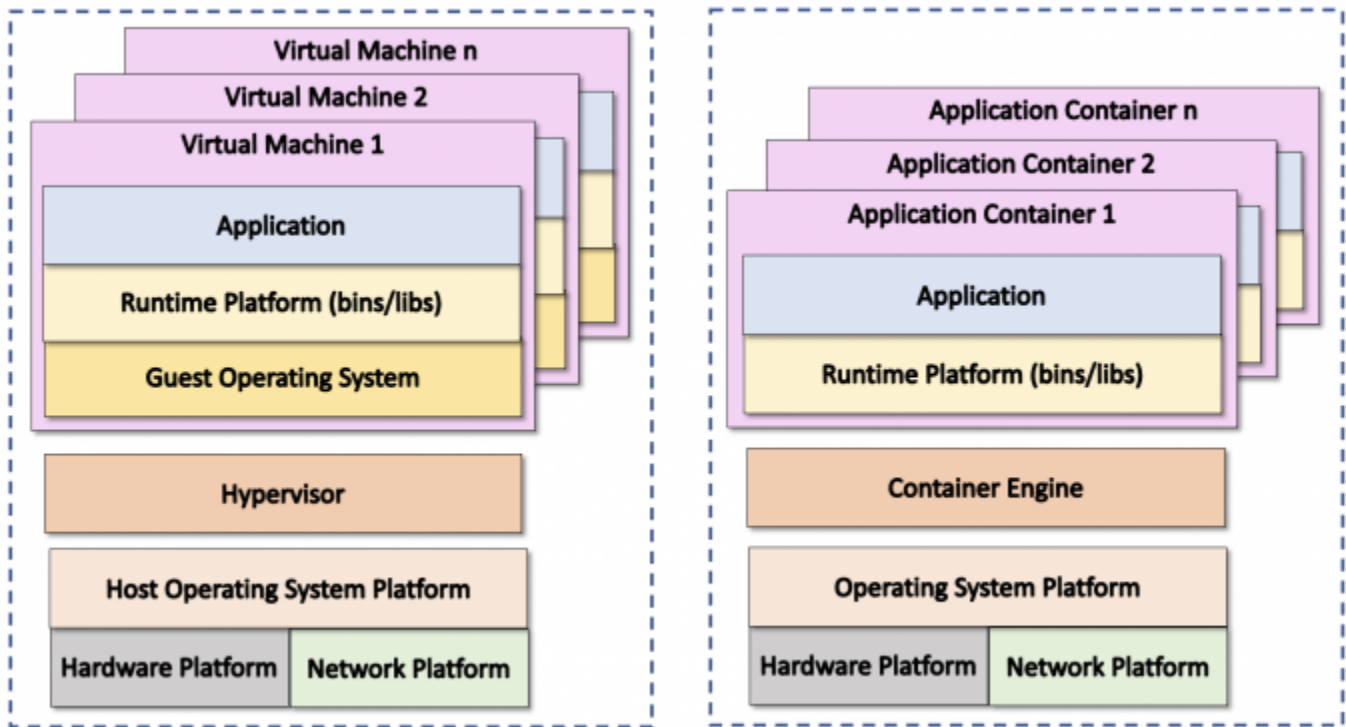


Figure 1: TVirtual Machines and Application Containers.

Virtual Machines

[Return to Top](#) A **Virtual Machine (VM)** is a software program that behaves as if it were a complete computer. Often the VMs are software versions of an existing **Hardware Platform**. For example, the Hardware Server running an **Reduced Instruction Set Computer (RISC)** processor, might host a VM that behave as if it were an x86, 68000, CISC, RISC, ARM, etc. The VM will have a virtual processor that executes the appropriate instruction set such as **Complex Instruction Set Computer (CISC)**. Generally, the **Hypervisor** also known as a Virtual Machine Monitor (VMM) creates, runs and monitors the execution of the VMs. Each VM is isolated from each other and from the host machine which is a good for security reasons. For example, the memory (also virtual) is allocated for only for one VM. If another VM needs to use the same physical memory, the memory is “zeroed” before it can be reused.

As a general rule, Hypervisor's are heavy when compared to **Container Engines** and Virtual Machines are heavier than Containers. The “heaviness” is in reference to the resources required. For example, a Hypervisor takes more memory and **Central Processing Unit (CPU)** than a Container Engine because of the amount of work that is required to create and manage the VMs. This means that the smaller the host machine, the more likely that Containers are a better solution. Another reason that VMs are heavier is that each VM has its own copy of a a Guest Operating system while Containers are designed to share key parts of the host operating system.

Application Containers

[Return to Top](#)

Core Operating System (Core OS) is a system for container-based virtualization. Core OS deploys applications in virtual containers as a way to provide effective hardware virtualization for businesses.

- [Container Engine](#)
- [Disk Image](#)
- [Virtual Disk Image \(VDI\)](#)
- [Virtual Machine Images](#)

From:
<https://www.omgwiki.org/dido/> - **DIDO Wiki**

Permanent link:
https://www.omgwiki.org/dido/doku.php?id=dido:public:ra:1.4_req:1_func:platform:virtnodes&rev=1608337705

Last update: **2020/12/18 19:28**

