

## 2.2.2.2 Node View

[return to Node Network View](#)

The Node View represents the internals of any particular [node](#) within the [node network](#). As represented in the figure below, it is comprised of five layers; however, the layers are not set in stone - each implementation of a node within a domain may be organized differently.

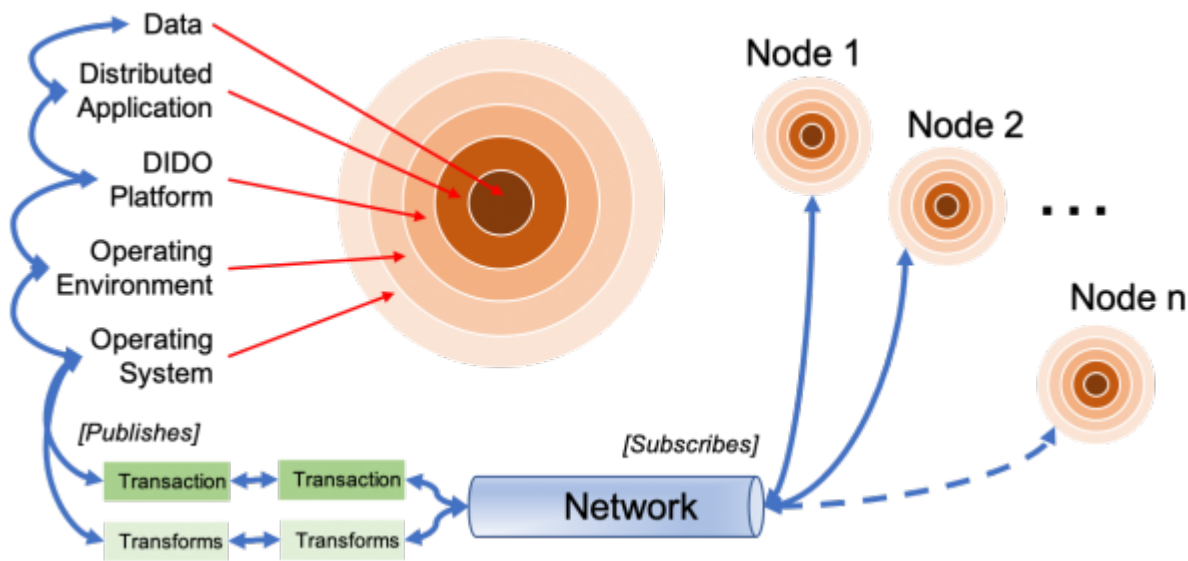


Figure 1: The idealized five layers of a Node.

At the boundary between each layer there is an interstitial layer formed by an [application\\_programming\\_interface](#), which is usually defined by one or more [technical](#) or [de facto](#) standards.

As each transaction, transform, or stream of data flows to or from a node over the network, it must travel through and/or interact with the:

- [2.2.2.2.1 Operating System \(OS\)](#)
- [2.2.2.2.2 Operating Environment](#)
- [2.2.2.2.3 DIDO Platform](#)
- [2.2.2.2.4 Distributed Applications](#)

From:  
<https://www.omgwiki.org/dido/> - **DIDO Wiki**

Permanent link:  
[https://www.omgwiki.org/dido/doku.php?id=dido:public:ra:1.2\\_views:2\\_tech\\_views:2-nodenet:2\\_node&rev=1591911190](https://www.omgwiki.org/dido/doku.php?id=dido:public:ra:1.2_views:2_tech_views:2-nodenet:2_node&rev=1591911190)

Last update: 2020/06/11 17:33

