4.3.8 Interoperability

Return to Non-Functional Requirements

- ☒ **[char][✓ char, 2021-06-01]~~Please Review~~**

About

https://www.isko.org/cyclo/interoperability#3.1

Interoperability is a characteristic of a product or system whose interfaces are completely understood to work with other products or systems, present or future, in either implementation or access, without any restrictions. There are different levels of interoperability. As one moves up the interoperability levels, the degree of interoperability increases in difficulty. The most difficult is the semantic level, in which two assets can communicate with little or no prep work using common detailed formal, machine readable Ontologies including a vocabulary of terms.

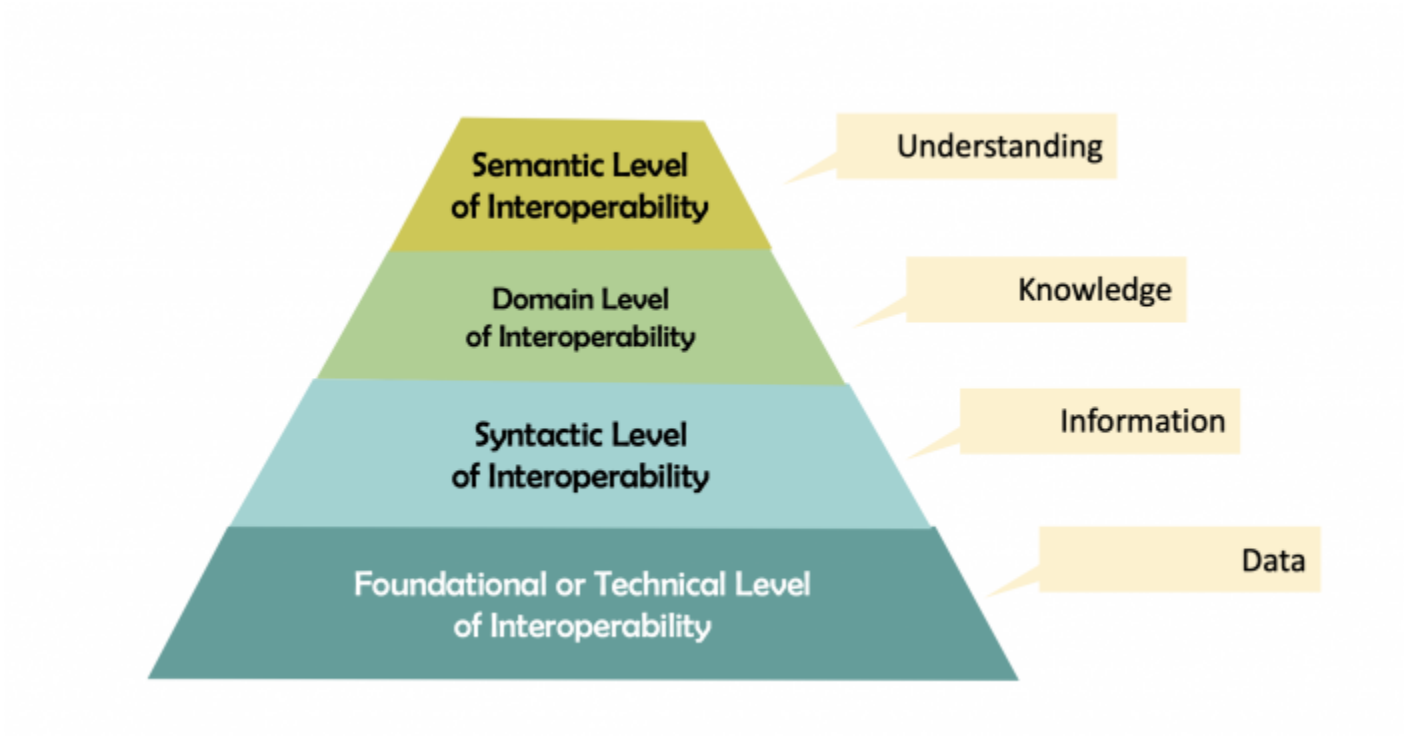


Figure 1: The Automation Pyramid and Interoperability

Foundational or Technical Level

return to Top

The *Foundational* or *Technical Interoperability Level* is concerned with the most fundamental and basic kind of interoperability. It provides the “foundation” for all the higher levels of interoperability. It

establishes the technical aspects of peer-to-peer interoperability that prevail regardless of hardware, operating system, or middleware platforms. The Foundational or Technical Interoperability Level is defined in terms of two perspectives: Data and System.

- From the Data perspective, there is a clear, shared expectation for the contents, context and meaning of that data (e.g., Big-Endian or Little-Endian, or size of an integer, or character set used)
- From the system perspective the differences in computer technology are non-existent (e.g., 16-bit, 32-bit and 64-bit processors. Reduced Instruction Set Computer (RISC) versus Complex Instruction Set Computer (CISC) computers, etc.). In a Distributed System, the network protocols are another part of the Foundational or Technical Level of interoperability (e.g., Transmission Control Protocol (TCP) and User Datagram Protocol (UDP) over Internet Protocol Address (IP Address), etc.).

Syntactic Level

return to Top

The *Syntax Level* is concerned with the correct combination and sequence of the elements in a language and, in this context, as it applies to Data Structure or a Programming Language. For example, in English, we do not say `ball red large plastic`, we would say `large, red plastic ball`. The first form is syntactically incorrect, the second form is not. Interoperability at the syntactical Level means two different systems can exchange information and be structurally equivalent. The interpretation of the syntactical data can be different (i.e., big to an ant is different than big to an elephant). The difference in interpretation is a semantic difference (see Semantic Level).

Domain or Structural Level

return to Top

The *Domain Level* is knowledge of a specific, specialized subject area, discipline or field. For example, there is specific domain knowledge in Chemistry, Organic Chemistry, Physics, Mathematics, or Statistics. A specific example might be the use of the word `round`. Round has different meanings in the context of Poker, Math, Cheese, and the Military. This is in contrast to general knowledge, or domain-independent knowledge which, in general, refers to the common usage of a word, sometimes referred to as the dictionary usage of a word. The use of the word Domain or Domain knowledge is used within general purpose disciplines such as history, law, systems engineering or even computer science. People with knowledge in a generic area (i.e., law) might have specific domain knowledge in computers, electronics, computers or even specific computer architectures such as Reduced Instruction Set Computer (RISC).

Semantic Level

return to Top

The *Semantic Level* is concerned with the meaning, relationship and restrictions on data and information

described in the Domain or Structural and Syntactical Levels. At this level, computer systems exchange information unambiguously. The information exchanged might not be identical but there is a shared understanding between the two systems about the meaning of the information. Some examples of Semantic Interoperability are described by the ability of:[1)]:

- Two independent programs with reasoning capability to arrive at the same conclusions from the same data
- An information system, without additional human intervention, to perform the tasks for which it was designed through the exchange of relevant data with other systems[2)], independently of how and what purpose this data was originally collected, stored and managed.
- One system to use data from an external source (without prior planning) and still able to output useful (though not necessarily perfect) results.

DIDO Specifics

return to Top

☐ *TBD - to be added/expanded in future revisions of the DIDO RA*

1)
Ontology Taxonomy Coordinating WG / OntacGlossary, Accessed 10 July 2020, http://colab.cim3.net/cgi-bin/wiki.pl?OntologyTaxonomyCoordinatingWG%2FOntacGlossary
2)
Note: mediated by formally specific definitions and axioms

From:
https://www.omgwiki.org/dido/ - **DIDO Wiki**

Permanent link:
https://www.omgwiki.org/dido/doku.php?id=dido:public:ra:1.4_req:2_nonfunc:05_interoperability&rev=1622606098

Last update: **2021/06/01 23:54**