

Decentralized Identifier (DID)

[Return to Glossary](#)

Decentralized Identifier (DID) is a globally unique persistent identifier that does not require a centralized registration authority and is often generated and/or registered cryptographically. The generic format of a DID is defined in § 3.1 DID Syntax. A specific DID scheme is defined in a DID method specification. Many—but not all—DID methods make use of distributed ledger technology (DLT) or some other form of decentralized network.

A DID is a simple text string consisting of three parts:

1. the **did** [Uniform Resource Locator \(URL\) / Uniform Resource Identifier \(URI\)](#) scheme identifier
2. the identifier for the DID method
3. the DID method-specific identifier.

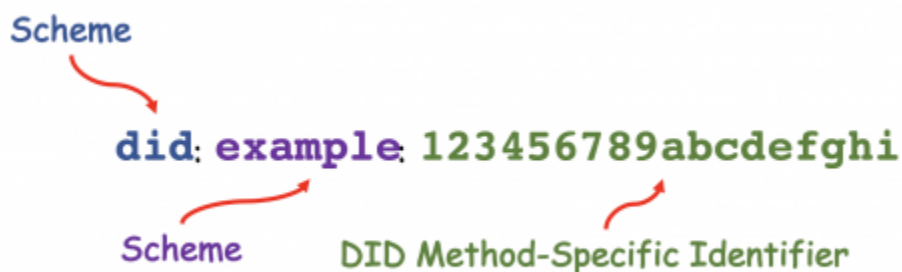


Figure 1: A simple example of a decentralized identifier (DID) (Derived from the W3C)

See: [W3C: Decentralized Identifiers \(DIDs\) 1.0](#)

Source: <https://www.w3.org/TR/did-core/>

From:

<https://www.omgwiki.org/dido/> - **DIDO Wiki**

Permanent link:

https://www.omgwiki.org/dido/doku.php?id=dido:public:ra:xapend:xapend.a_glossary:d:did&rev=1643033922



Last update: **2022/01/24 09:18**